

## General Information

A mirror secret door will perfectly hide the entry to your basement, study, man cave, or any other room hidden room.

Our extensive experience and industry leading hardware provides superior concealment, security and quality.

## Features

- Pre-hung and tested. No wiring or assembly required.
- Extensive customization options.
- Optional locking system addition. Compatible with our unique secret switches.
- Unlimited phone and video support. Expert advice and support before, during, and after installation.



## Available Options

- Wood Species: See “Materials” section
- Finishes: See “Finishes” section
- Sizing: Customizable up to 44”W, 92”T
- Swing Direction: Out
- Hinge Side: Left or Right
- Face Frame Corners: Shaker or Mitered
- Wireless Switches: Book, Keypad, Fob, etc.
- Power method - Battery or AC wall power.

## Additional Customization

If you require additional customization beyond what is available on our website, please contact us for availability and a no-obligation price quote.

## Materials



**American Hard Maple**  
Recommended for painted finishes.



**Clear Alder**  
Recommended for painted or stained finishes.

## Finishes



**Unfinished:** *Apply your own finish*  
Sanded and ready to accept a finish.




**Stained:** *Light, Medium, Dark, Match*  
Hand applied stain with sprayed satin topcoat.


**Configuration Options**

No Baseboard / Stationary Baseboard

In this scenario the mirror frame extends all the way to the floor.

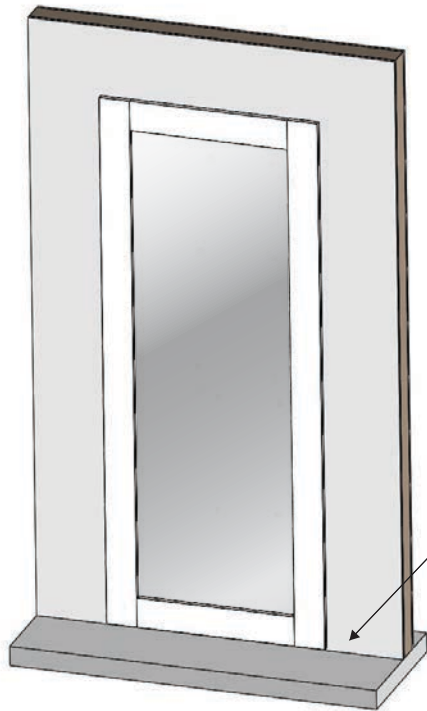


Baseboard of any height can be applied to the wall on either side of the mirror frame, if desired. The baseboard will not move with the door.

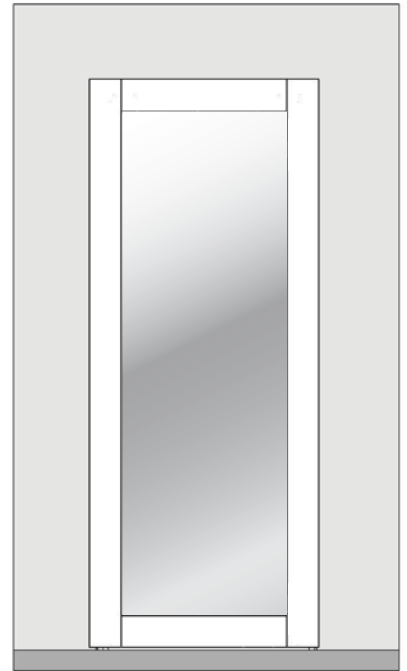


Moving Baseboard

In this scenario the bottom of the mirror frame touches the top of the baseboard.

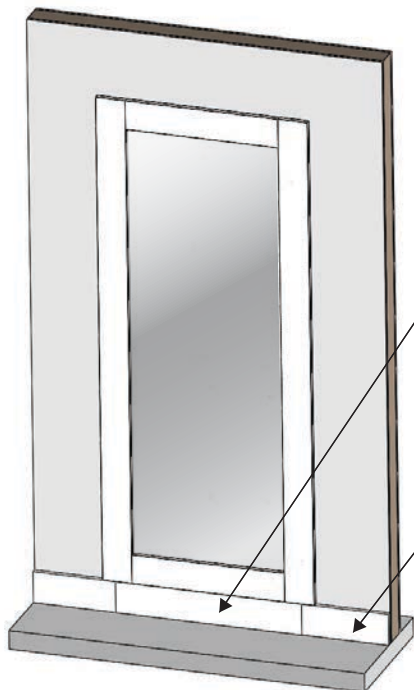

The section of baseboard just below the mirror frame attaches to the door panel and moves with the mirror.

The stationary sections of baseboard attach to the surrounding wall. Exact location and method of seaming the baseboard is at client's discretion.

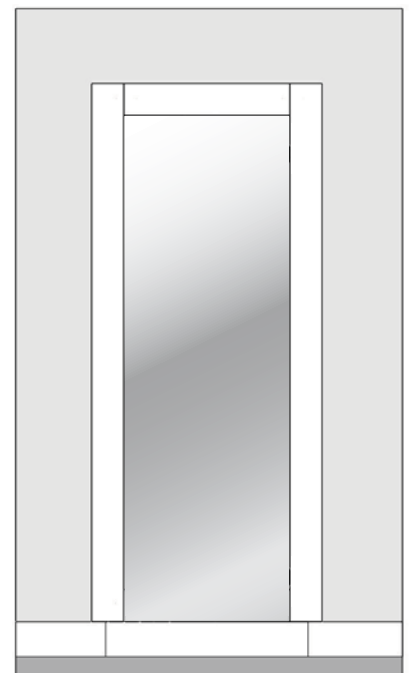

## Wall Condition Requirements

The door must be installed in a wall opening that is plumb and level. The floor must be a hard surface (IE, concrete, wood, tile) and free of humps or bellies.

It is also recommended to use a level on the face of the wall surrounding the opening and verify that the surfaces are flat.

NOTE: The final quality of the concealment and function of the door depends heavily on the quality of the door opening. For best results, correct any wall or floor issues before beginning your installation. Joints at baseboard are the customer's responsibility and directly impact how well concealed the door is.

## Key Dimensions


Use the charts below to determine the key dimensions of your door based on your chosen wall opening Width ("X") and Height ("Y").

### General Dimensions

"A"	"X" + 1.375
"B"	"Y" + 1.125
"C"	"X" - 6"
"D"	"Y" - 8.25" - "Baseboard Height"
"E"	.75"
"F"	.5"
"G"	"X" + 1.5"
"H"	4.5"


### Clearance Dimensions

Clear Width	"X" - 4.5"
Clear Height	"Y" - 1.125"

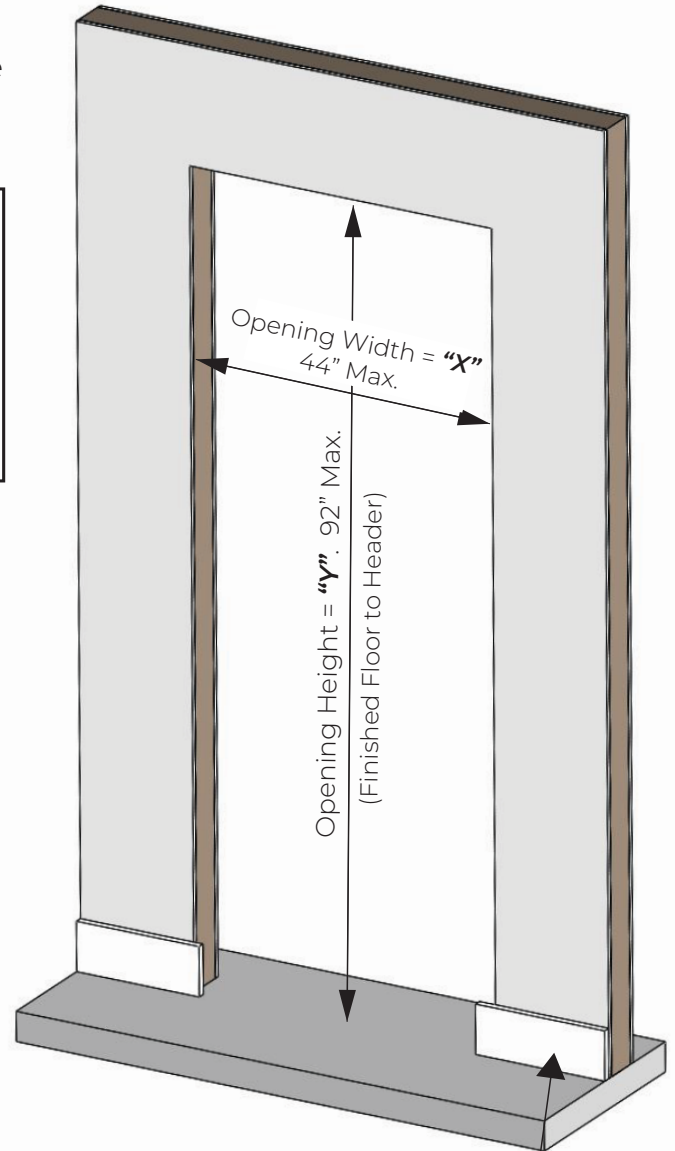


The door can be used with or without baseboard. The top of the baseboard will touch the underside of the mirror frame. If used without baseboard there will be a gap of 3/8" between the floor and underside of the mirror frame.


Front View - Closed

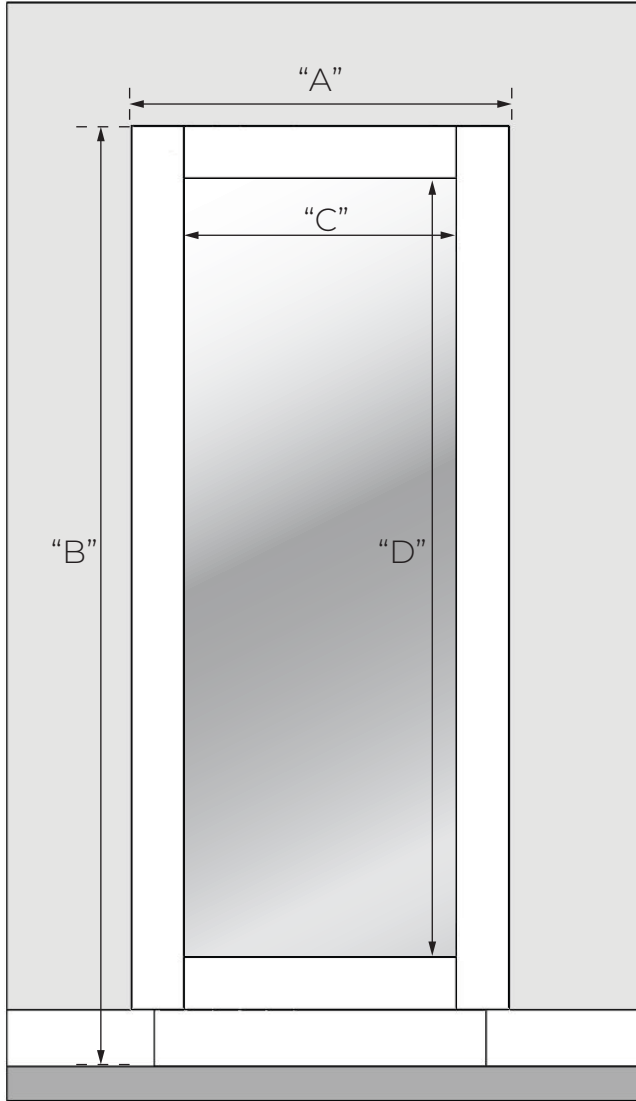

Front View - Open

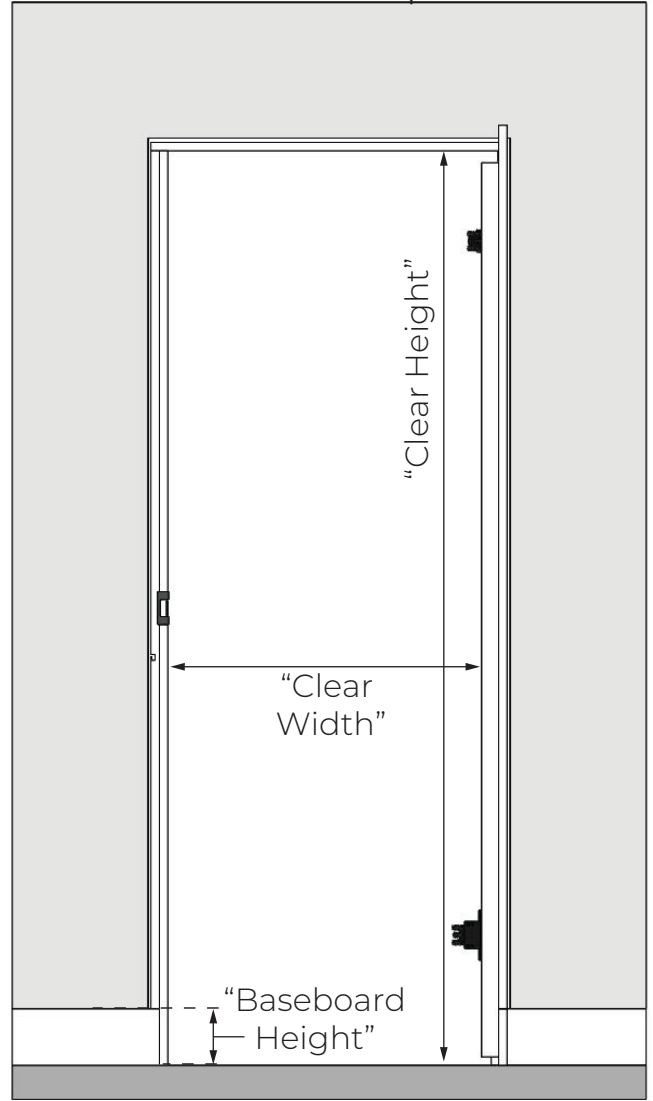

Top View - Closed

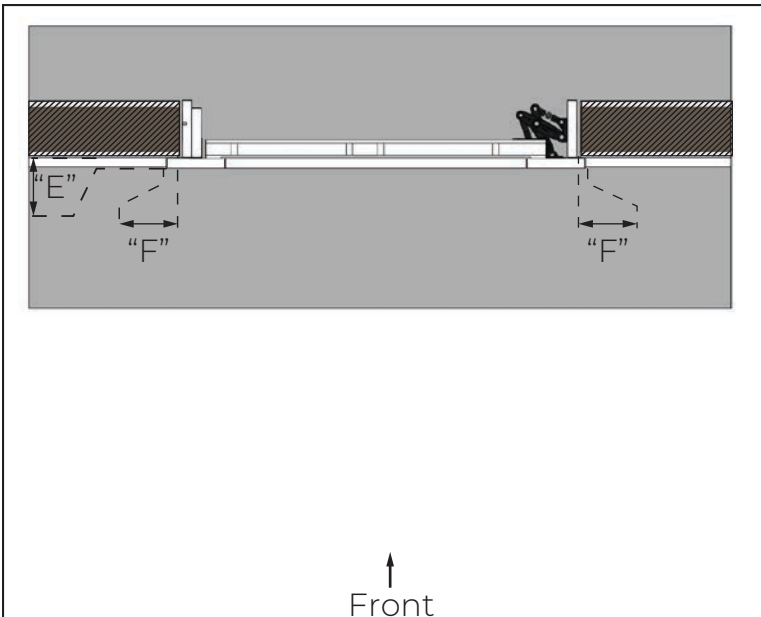

Top View - Open

